




Changzhou Suma Precision Machinery Co...

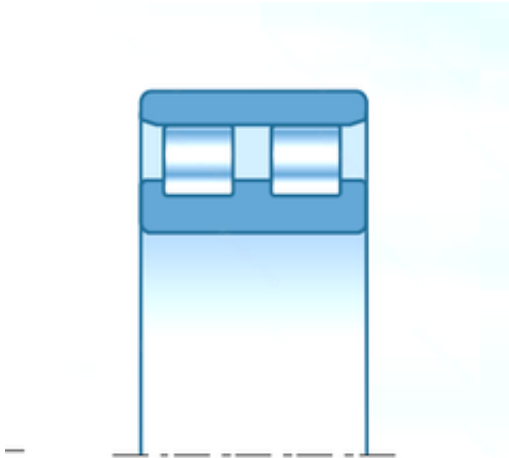

NN3011KC1NAP4 Bearing 2D drawings and 3D CAD models

55 mm x 90 mm x 26 mm NTN NN3011KC1NAP4 cylindrical roller bearings

Bearing No. NN3011KC1NAP4

Size	55x90x26 mm
Bore Diameter	55 mm
Outer Diameter	90 mm
Width	26 mm
d	55 mm
D	90 mm
B	26 mm
C	26 mm
Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.615
EAN	4547359130362
Product Group	B04270
Bore Profile	Tapered
Cage Material	Brass
Precision Class	ABEC 7 ISO P4
Number of Rows of Rollers	Double Row
Separable	Outer Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C1NA
Retainer	Yes



Changzhou Suma Precision Machinery Co...

Relubricatable	Yes
Inch - Metric	Metric
Other Features	3 Rib Inner Ring Plain Outer Ring Precision Bearing Cage on Inner Ring OD
Long Description	55MM Bore; Tapered Bore Profile; 90MM Outside Diameter; 26MM Width; Brass Cage Material; ABEC 7 ISO P4; Double Row; Outer Ring - Both Sides Separable; No Snap Ring; Relubricatable; C1NA Internal CI
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	NN3011KC1NAP4
Weight / LBS	1.359
Bore	2.165 Inch 55 Millimeter
Outside Diameter	3.543 Inch 90 Millimeter
Width	1.024 Inch 26 Millimeter
bore diameter:	55 mm
maximum rpm:	8600 rpm
outside diameter:	90 mm
bearing material:	Hardened Alloy Steel
overall width:	26 mm
cage material:	High Strength, 2 piece, Machined Brass
flanges:	(3) Inner Ring
finish/coating:	Uncoated
bore type:	Tapered 1:12



Changzhou Suma Precision Machinery Co...

closure type:	Open
number of rows:	2
resistance features:	Clean Room, Vacuum
internal clearance:	C1NA
outer ring width:	26 mm
operating temperature range:	-40 to 120 ° C
fillet radius:	1.1 mm
dynamic load capacity:	69500 N
series:	NN30K
static load capacity:	96500 N
manufacturer product page:	Click here
precision rating:	ISO Class 4